




ASSEMBLY INSTRUCTIONS


1

PLEASE READ INSTRUCTIONS COMPLETELY BEFORE BEGINNING. Carefully remove contents from box. Make sure that all parts and hardware Are included using the Parts List below.

Tools Required: #2 Phillips Head Screwdriver; 4mm Allen Key(included)

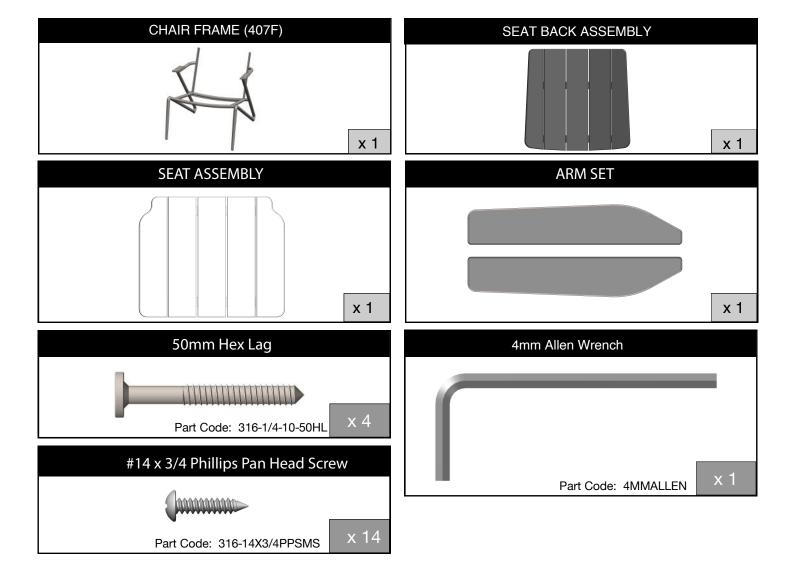


ATTACH SEAT TRAY ASSEMBLY

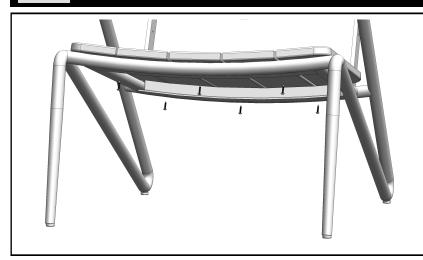

On a clean flat surface connect Seat Tray Assembly using (6) 3/4" Phillips Pan Head Screw (AS SHOWN). Do Not Over Tighten.

2


ATTACH SEAT BACK ASSEMBLY

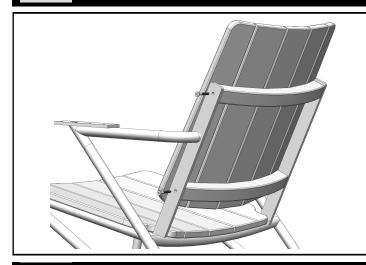

Connect Seat Back Assembly to Chair Frame on both sides with (4)50mm Hex Lags (AS SHOWN). Do Not Over Tighten.

3

ATTACH ARMS TO FRAME

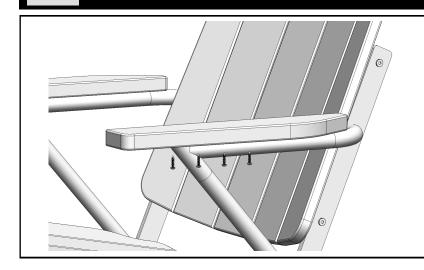

Attach Arms to Chair Frame with (4) 3/4" Phillips Pan Head Screws Per Side (AS SHOWN). Do Not Over Tighten.