



# Casual Fireside <sup>TM</sup>

## Glass Guard Assembly and Care Instructions.

### Tools Needed

- \* Standard Flat Head Screwdriver
- \* Cotton gloves for handling glass panels (Optional)


### Included in this Kit

- \* 4 Glass panels
- \* 8 brackets; 4 top, 4 bottom

- \* 51-34G Rectangle Glass Guard - for 10"x30" Rectangle Burners
- \* 51-141G Square Glass Guard - for 20" Square Burners
- \* 51-142G Small Round Glass Guard - for 20" Round Burners
- \* 51-143G Large Round Glass Guard - for 24" Round Burners
- \* 51-144G X-Small Round Glass Guard - for 16" Round Burners

### Installation Instructions

**STEP 1**

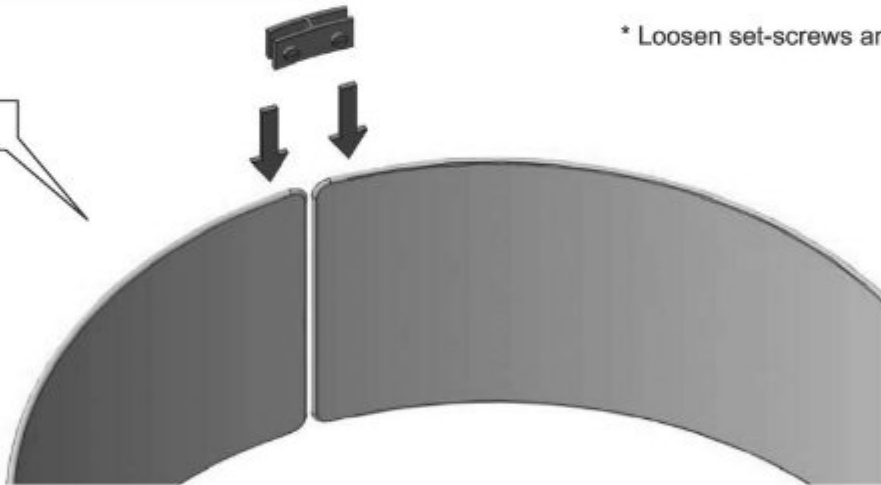

\* Loosen set-screws and lower bracket onto glass.


**STEP 2**



\*Place bracket 1" below the top edge of the glass. Tighten set-screws until snug. DO NOT over tighten as glass may break.


\*Repeat steps 1 & 2 for remaining 3 brackets

**STEP 3**

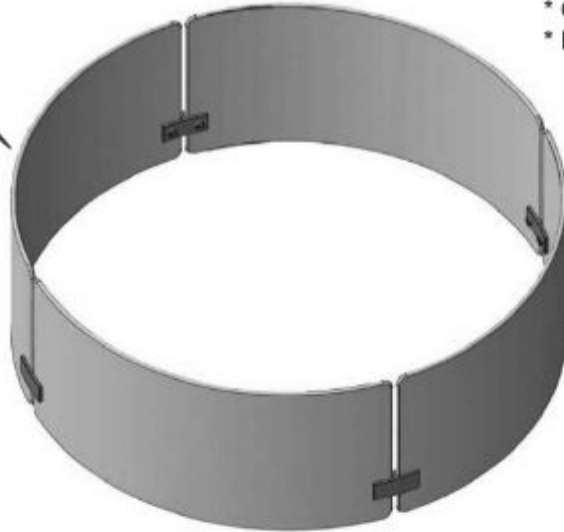

- \* CAREFULLY flip assembled glass over.
- \* Repeat steps 1 and 2 for remaining brackets.

**STEP 4**

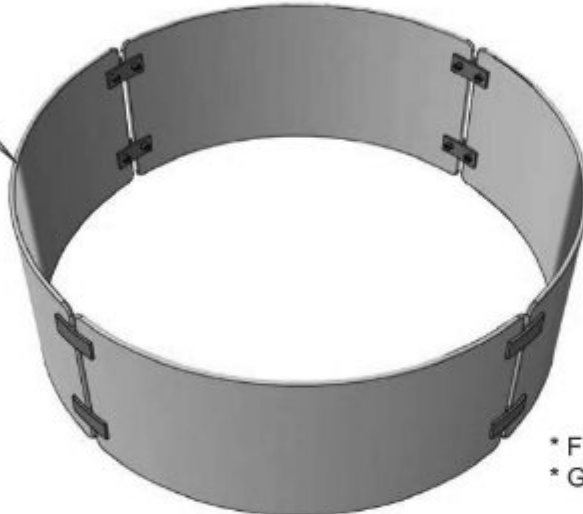

- \* Finish assembled glass should look like this.
- \* Gently set the glass guard onto firepit.

**HOW TO CLEAN**

- \* Soot can build up on the glass guard & should be cleaned off regularly.
- \* Clean Glass with a water & white vinegar solution or commercially available streak free glass cleaner.

**CAUTION**

- \* DO NOT touch glass while fire pit is lit or right after use because glass will be HOT and could cause burns.
- \* If glass needs to be handled while the fire pit is lit or before cool to the touch use high temperature gloves with a non-slip grip.
- \* DO NOT attempt to clean glass while firepit is lit or for at least 30 minutes following use because glass will be hot and may break from sudden cooling.