

to protect your product, please read the operating instructions before opening the parasol

TUUCI | MAX cantilever with auto-lift assist piston



assembly & operating instructions


applies to:
ocean master MAX cantilever & plantation MAX cantilever

Step 1

Remove all packaging from the umbrella, including under the canopy.


Step 2

At the bottom of the mast pull the pin to unlock the cam lock handle and open the cam lock handle.




Step 3

After the security stem is installed on the base (see base installation instructions), slide the beauty cover over the mast and insert the mast over the security stem.

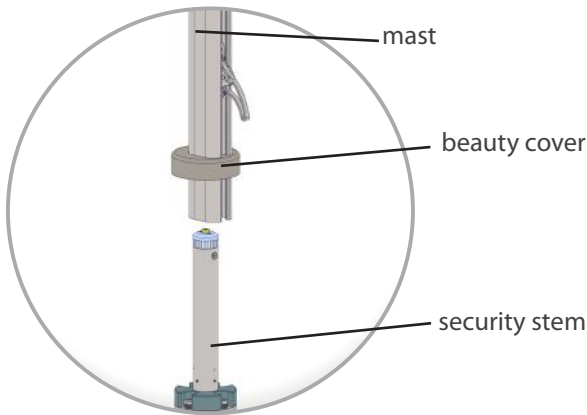

Step 4

Push cam lock handle down until it is locked into the security stem. Insert the pin into the lock handle.





Step 5


Gently separate each rib individually from the center hub approximately 10 inches. If the rib does not move easily, do not force. Inspect the product for additional packaging.

Step 6

Push cart handle up until it snaps into the locking position

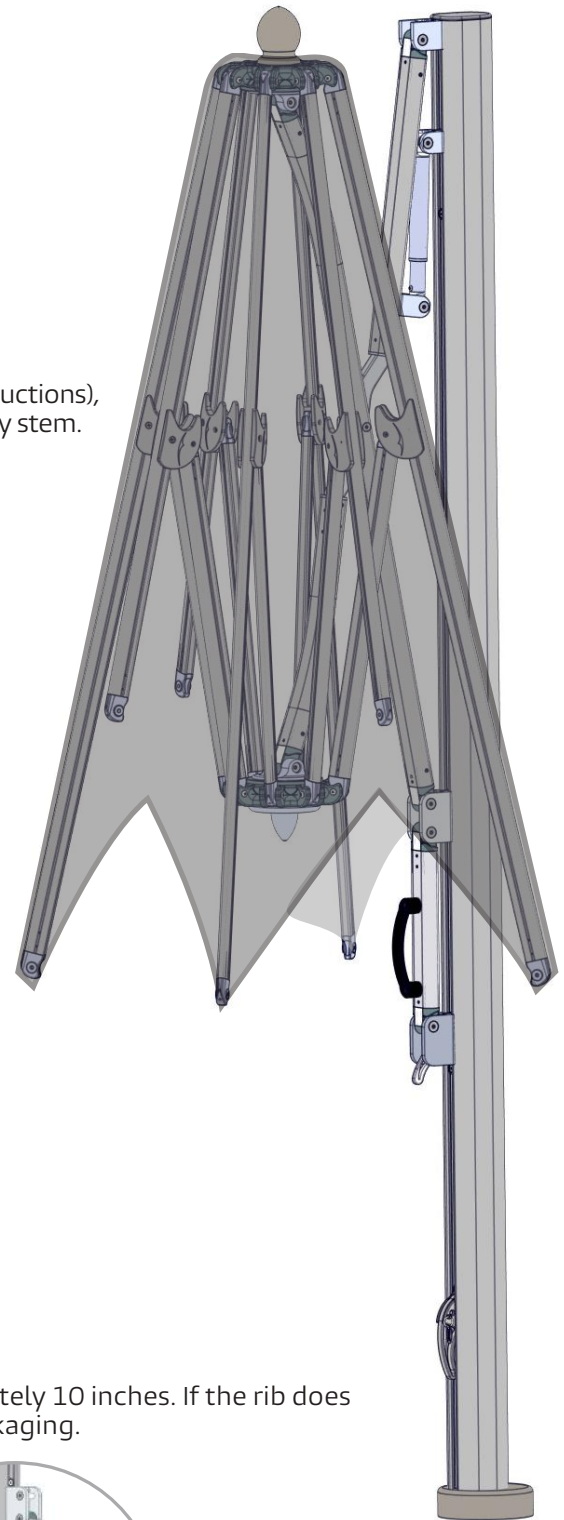

CLOSING UMBRELLA

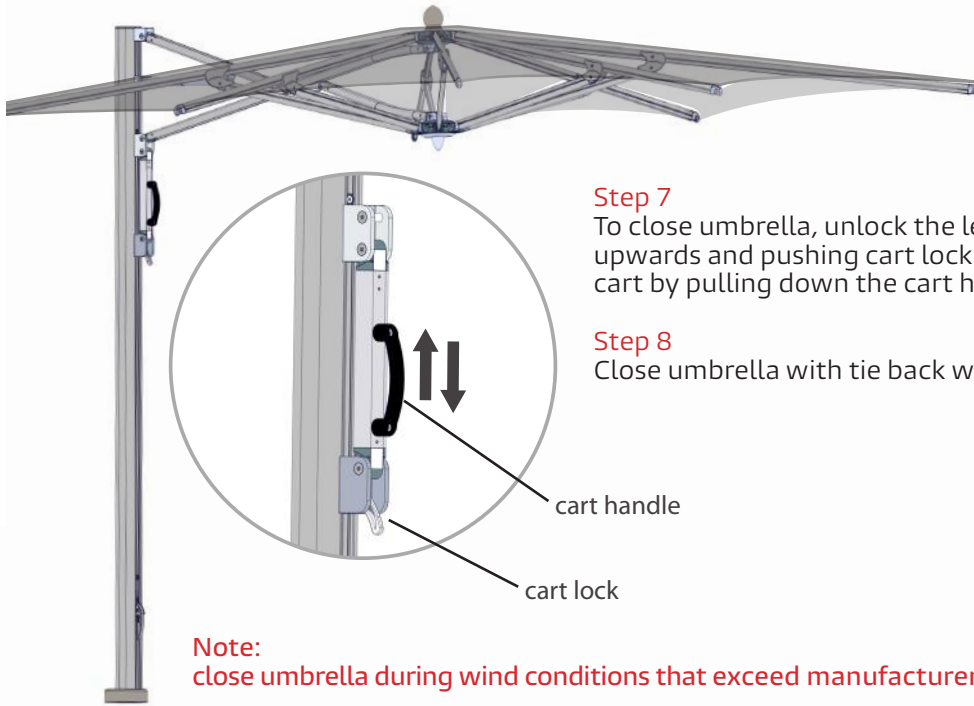


Step 7

To close umbrella, unlock the lever (by pushing cart handle upwards and pushing cart lock lever in) then slide down the cart by pulling down the cart handle.

Step 8

Close umbrella with tie back when not in use.



Note:
close umbrella during wind conditions that exceed manufacturer's specifications.


IF APPLICABLE - WITH LED LIGHT

Step 1

plug in the electrical cord to outlet.

Step 2

Tap finial once to power on-off, or touch and hold for light dimming control.

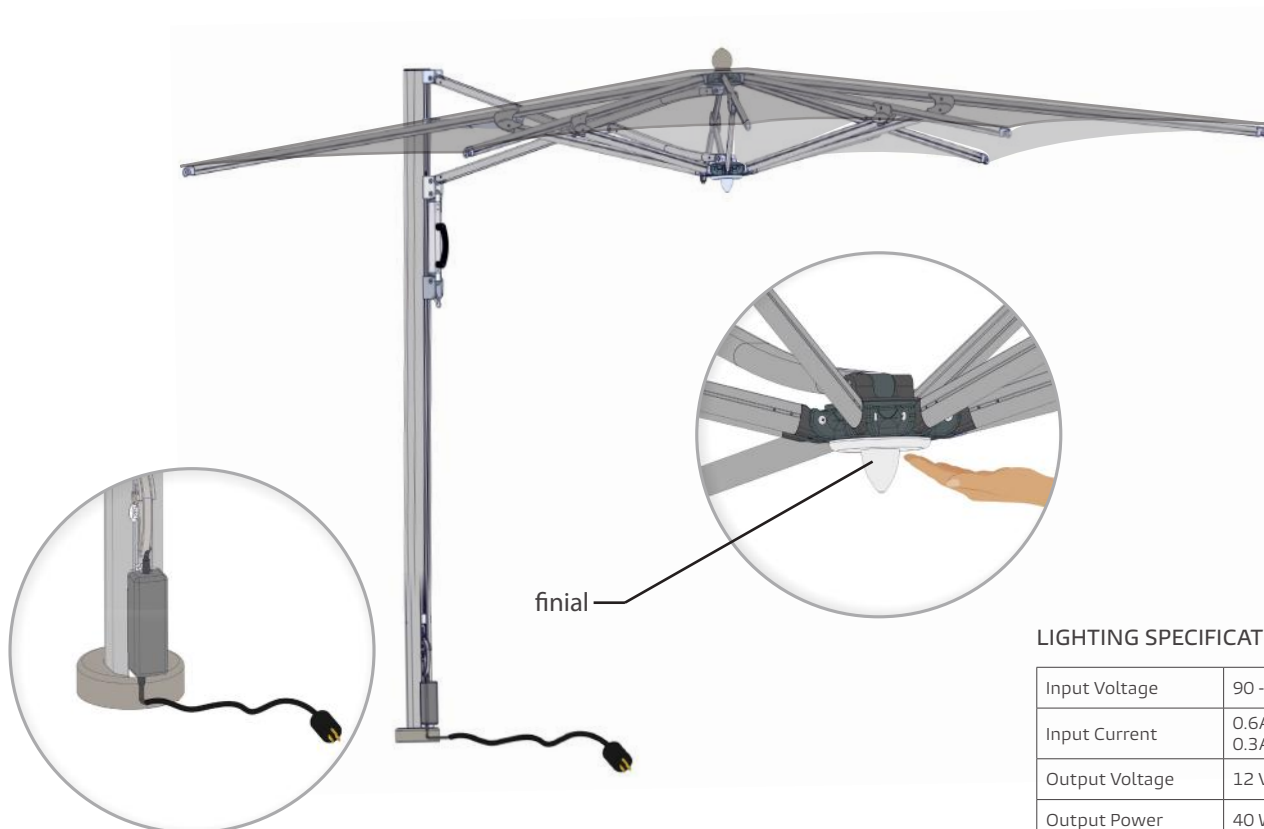

LIGHTING SPECIFICATIONS

Input Voltage	90 - 305VAC
Input Current	0.6A / 115VAC 0.3A / 230VAC
Output Voltage	12 VDC
Output Power	40 Watts

Unit is supplied with a 12ft power cord and plug.

TUUCI frames are constructed from durable, marine-grade, weather resistant materials including: fiberglass, armor-wall aluminum, Dura-TEAK composites, Aluma-TEAK aluminum and sustainable hardwood. All fasteners (nuts, bolts, pulleys, cam cleats, etc.) are marine-grade stainless steel and will withstand the most corrosive environments. Proper care and maintenance is important to extend the serviceable life of all TUUCI products. We recommend the following:

- Fresh water rinses once a week
- Weekly inspection of your TUUCI product is recommended. Loose screws should be tightened and any broken components replaced immediately to avoid further damage to your product.
- Prior to opening, ensure that the shade product is properly secured to an adequate shade anchor system.
- When opening a TUUCI parasol, separate each rib 10 inches from the center post, before raising the hub. Do not force hub if it does not rise easily.
- When closing the parasol, pull the fabric out from between the struts to avoid pinching or damaging the TUFF-SKIN canopy membrane.
- TUUCI recommends that all collapsible shade equipment be closed in wind conditions which exceed 25 MPH.
- Clean above ground parasol bases regularly to maintain appearance. To clean, gently wash with soap and water using a nonabrasive cloth or pad.
- Check bolts in security stem regularly to ensure that they remain fully tightened.
- Do not roll Aluma-crete (Aluminum Shell, Concrete Filled) bases on their side as damage to shell or finish can occur.
- Do not use on stairways or over distances which exceed 50 feet, as damage to welded wheel tray may occur.
- Canopy should be cleaned regularly and can be cleaned without being removed from the frame. Hose down and clean with a mild soap and lukewarm water (no more than 100° F.) using a soft bristle brush. Rinse thoroughly to remove soap. Allow fabric to air dry. TUUCI Parts can be purchased at parts@tuuci.com.
- Do not use a pressure washer to clean canopes.